

Wiring DUCT Catalog

RV® 규격인증제품
E 216771

Ro RoHS지침적합



 **영신프라텍(주)**

www.yspt.co.kr

개방형 백색 / 회색 / 청색 (RoHS-친환경 제품)

Open type White Color / Gray Color / Blue Color (RoHS-Green Products)

특허 제 103196호
PAT. No. 103196





















특허 제 1030160호
PAT. No. 1030160

디자인 등록 제 0583859호
Design No. 0583859

표준 사양 (Standard Specifications)

UL 규격인증제품 No. E 216771 난연성 실험 UL 94 V-O 성능 적합
UL Certifications No. E 216771 Self-Extinguishing (UL94 V-O)

RoHS 지침 적합 제품 (EU, 유럽, 일본, 미국 기준) 생산 가능
The suitable production of RoHS guidelines is possible.

DO - 34		DO - 44		DO - 64	
 <ul style="list-style-type: none"> 길이 (Length) : 2,000 m/m Wire Volume (IV2SQ) : 40 pcs 포장 (Package) : 20 EA 		 <ul style="list-style-type: none"> 길이 (Length) : 2,000 m/m Wire Volume (IV2SQ) : 55 pcs 포장 (Package) : 20 EA 		 <ul style="list-style-type: none"> 길이 (Length) : 2,000 m/m Wire Volume (IV2SQ) : 85 pcs 포장 (Package) : 20 EA 	
DO - 26	DO - 36	DO - 46	DO - 66	DO - 86	
 <ul style="list-style-type: none"> 길이 (Length) : 2,000 m/m Wire Volume (IV2SQ) : 45 pcs 포장 (Package) : 20 EA 	 <ul style="list-style-type: none"> 길이 (Length) : 2,000 m/m Wire Volume (IV2SQ) : 65 pcs 포장 (Package) : 20 EA 	 <ul style="list-style-type: none"> 길이 (Length) : 2,000 m/m Wire Volume (IV2SQ) : 85 pcs 포장 (Package) : 20 EA 	 <ul style="list-style-type: none"> 길이 (Length) : 2,000 m/m Wire Volume (IV2SQ) : 130 pcs 포장 (Package) : 20 EA 	 <ul style="list-style-type: none"> 길이 (Length) : 2,000 m/m Wire Volume (IV2SQ) : 180 pcs 포장 (Package) : 12 EA 	
DO - 48		DO - 68		DO - 88	
 <ul style="list-style-type: none"> 길이 (Length) : 2,000 m/m Wire Volume (IV2SQ) : 115 pcs 포장 (Package) : 20 EA 		 <ul style="list-style-type: none"> 길이 (Length) : 2,000 m/m Wire Volume (IV2SQ) : 180 pcs 포장 (Package) : 20 EA 		 <ul style="list-style-type: none"> 길이 (Length) : 2,000 m/m Wire Volume (IV2SQ) : 240 pcs 포장 (Package) : 12 EA 	
DO - 108		DO - 128		DO - 148	
 <ul style="list-style-type: none"> 길이 (Length) : 2,000 m/m Wire Volume (IV2SQ) : 280 pcs 포장 (Package) : 12 EA 		 <ul style="list-style-type: none"> 길이 (Length) : 2,000 m/m Wire Volume (IV2SQ) : 320 pcs 포장 (Package) : 12 EA 		 <ul style="list-style-type: none"> 길이 (Length) : 2,000 m/m Wire Volume (IV2SQ) : 360 pcs 포장 (Package) : 12 EA 	
DO - 410		DO - 610		DO - 810	
 <ul style="list-style-type: none"> 길이 (Length) : 2,000 m/m Wire Volume (IV2SQ) : 130 pcs 포장 (Package) : 20 EA 		 <ul style="list-style-type: none"> 길이 (Length) : 2,000 m/m Wire Volume (IV2SQ) : 200 pcs 포장 (Package) : 20 EA 		 <ul style="list-style-type: none"> 길이 (Length) : 2,000 m/m Wire Volume (IV2SQ) : 280 pcs 포장 (Package) : 12 EA 	
DO - 1010		DO - 1210		DO - 1410	
 <ul style="list-style-type: none"> 길이 (Length) : 2,000 m/m Wire Volume (IV2SQ) : 320 pcs 포장 (Package) : 12 EA 		 <ul style="list-style-type: none"> 길이 (Length) : 2,000 m/m Wire Volume (IV2SQ) : 360 pcs 포장 (Package) : 12 EA 		 <ul style="list-style-type: none"> 길이 (Length) : 2,000 m/m Wire Volume (IV2SQ) : 400 pcs 포장 (Package) : 12 EA 	

표준형 백색 / 회색 / 청색 (RoHS-친환경 제품)

Standard type White Color / Gray Color / Blue Color (RoHS-Green Products)

한국특허 제 388153호
KOR PAT. No. 388153

일본특허 제 2841186호
JAN PAT. No. 2841186






















표준사양 (Standard Specifications)

UL 규격인증제품 No. E 216771 난연성 실험 UL 94 V-O 성능 적합
UL Certifications No. E 216771 Self-Extinguishing (UL94 V-O)

Ro RoHS지침적합제품 (EU, 유럽, 일본, 미국 기준) 생산가능
The suitable production of RoHS guidelines is possible.

커버와 본체의 미끄럼 방지 위한 연질공법


Soft p.v.c technology on the covers makes non-slip efficiency.

DG - 23	DG - 24	DG - 34	DG - 44	DG - 64	
<div></div> <div><ul style="list-style-type: none">• 길이 (Length): 2,000 m/m• Wire Volume (IV2SQ): 20 pcs• 포장 (Package): 20 EA</div>	<div></div> <div><ul style="list-style-type: none">• 길이 (Length): 2,000 m/m• Wire Volume (IV2SQ): 35 pcs• 포장 (Package): 20 EA</div>	<div></div> <div><ul style="list-style-type: none">• 길이 (Length): 2,000 m/m• Wire Volume (IV2SQ): 40 pcs• 포장 (Package): 20 EA</div>	<div></div> <div><ul style="list-style-type: none">• 길이 (Length): 2,000 m/m• Wire Volume (IV2SQ): 55 pcs• 포장 (Package): 20 EA</div>	<div></div> <div><ul style="list-style-type: none">• 길이 (Length): 2,000 m/m• Wire Volume (IV2SQ): 85 pcs• 포장 (Package): 20 EA</div>	
DG - 26	DG - 36	DG - 46	DG - 56	DG - 66	DG - 86
<div></div> <div><ul style="list-style-type: none">• 길이 (Length): 2,000 m/m• Wire Volume (IV2SQ): 45 pcs• 포장 (Package): 20 EA</div>	<div></div> <div><ul style="list-style-type: none">• 길이 (Length): 2,000 m/m• Wire Volume (IV2SQ): 65 pcs• 포장 (Package): 20 EA</div>	<div></div> <div><ul style="list-style-type: none">• 길이 (Length): 2,000 m/m• Wire Volume (IV2SQ): 85 pcs• 포장 (Package): 20 EA</div>	<div></div> <div><ul style="list-style-type: none">• 길이 (Length): 2,000 m/m• Wire Volume (IV2SQ): 110 pcs• 포장 (Package): 20 EA</div>	<div></div> <div><ul style="list-style-type: none">• 길이 (Length): 2,000 m/m• Wire Volume (IV2SQ): 130 pcs• 포장 (Package): 20 EA</div>	<div></div> <div><ul style="list-style-type: none">• 길이 (Length): 2,000 m/m• Wire Volume (IV2SQ): 180 pcs• 포장 (Package): 12 EA</div>
DG - 38	DG - 48	DG - 58	DG - 68	DG - 88	DG - 108
<div></div> <div><ul style="list-style-type: none">• 길이 (Length): 2,000 m/m• Wire Volume (IV2SQ): 100 pcs• 포장 (Package): 20 EA</div>	<div></div> <div><ul style="list-style-type: none">• 길이 (Length): 2,000 m/m• Wire Volume (IV2SQ): 115 pcs• 포장 (Package): 20 EA</div>	<div></div> <div><ul style="list-style-type: none">• 길이 (Length): 2,000 m/m• Wire Volume (IV2SQ): 140 pcs• 포장 (Package): 20 EA</div>	<div></div> <div><ul style="list-style-type: none">• 길이 (Length): 2,000 m/m• Wire Volume (IV2SQ): 180 pcs• 포장 (Package): 20 EA</div>	<div></div> <div><ul style="list-style-type: none">• 길이 (Length): 2,000 m/m• Wire Volume (IV2SQ): 240 pcs• 포장 (Package): 12 EA</div>	<div></div> <div><ul style="list-style-type: none">• 길이 (Length): 2,000 m/m• Wire Volume (IV2SQ): 300 pcs• 포장 (Package): 12 EA</div>
DG - 410	DG - 610	DG - 810	DG - 1010		
<div></div> <div><ul style="list-style-type: none">• 길이 (Length): 2,000 m/m• Wire Volume (IV2SQ): 130 pcs• 포장 (Package): 20 EA</div>	<div></div> <div><ul style="list-style-type: none">• 길이 (Length): 2,000 m/m• Wire Volume (IV2SQ): 200 pcs• 포장 (Package): 20 EA</div>	<div></div> <div><ul style="list-style-type: none">• 길이 (Length): 2,000 m/m• Wire Volume (IV2SQ): 300 pcs• 포장 (Package): 12 EA</div>	<div></div> <div><ul style="list-style-type: none">• 길이 (Length): 2,000 m/m• Wire Volume (IV2SQ): 370 pcs• 포장 (Package): 12 EA</div>		

제품 비교 (Comparison)


● 개방형 (Open type)

	A	B	C	D	E
DO - 34	5.5	12.5	10	2	15
DO - 44	5.5	12.5	10	2	15
DO - 64	5.5	12.5	10	2	15
DO - 26	5.5	12.5	12	2	30
DO - 36	5.5	12.5	12	2	30
DO - 46	5.5	12.5	12	2	30
DO - 66	5.5	12.5	12	2	30
DO - 86	5.5	12.5	12	2	30
DO - 48	10	20	14	3	50
DO - 68	10	20	14	3	50
DO - 88	10	20	14	3	50
DO - 108	10	20	14	3	50
DO - 410	10	20	16	3	65
DO - 610	10	20	16	3	65
DO - 810	10	20	16	3	65
DO - 1010	10	20	16	3	65

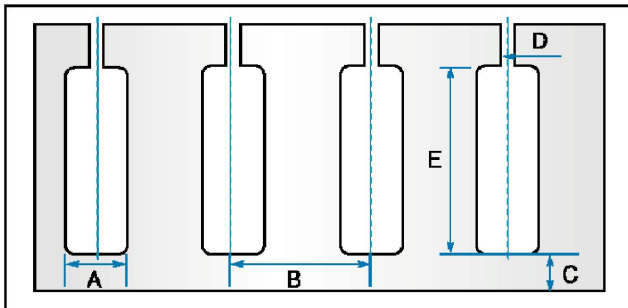


● 표준형 (Standard type)

DG - 23	10	20	6	15
DG - 24	10	20	6	20
DG - 34	10	20	6	20
DG - 44	10	20	6	20
DG - 64	10	20	6	20
DG - 26	10	20	6	40
DG - 36	10	20	6	40
DG - 46	10	20	6	40
DG - 56	10	20	6	40
DG - 66	10	20	6	40
DG - 86	10	20	6	40
DG - 38	10	20	8	57
DG - 48	10	20	8	57
DG - 58	10	20	8	57
DG - 68	10	20	8	57
DG - 88	13	25	8	57
DG - 108	13	25	8	57
DG - 410	10	20	8	76
DG - 610	10	20	8	76
DG - 810	13	25	8	76
DG - 1010	13	25	8	76

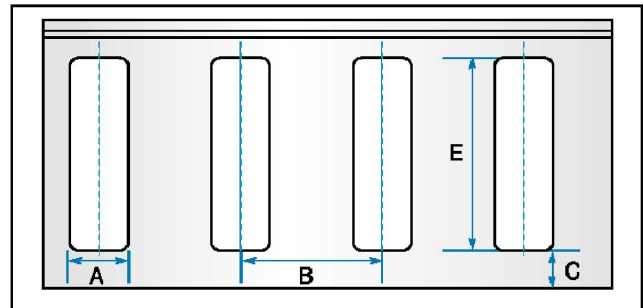

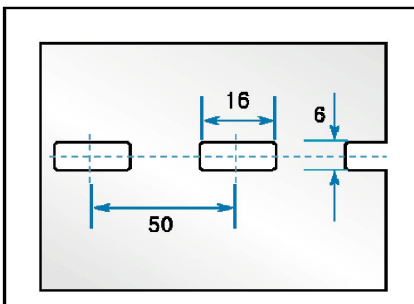● 하단부 타공사이즈 (개방형/표준형) 동일 Bottom view (Open and Standard type)




◆ Model

DG - 23, 24, 26, 34, 36, 38,

◆ Model

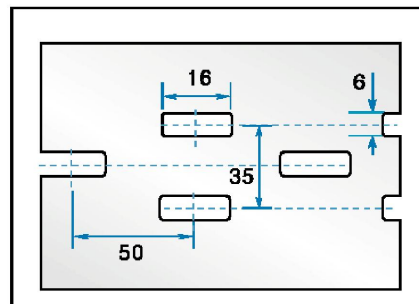DO - 34, 44, 36, 46, 48,




◆ Model

DG - 64, 66, 68, 610

◆ Model

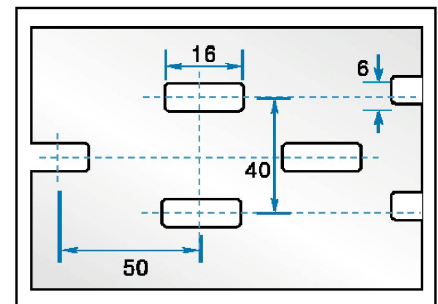DO - 64, 66, 68, 610



◆ Model

DG - 86, 88, 810, 108,

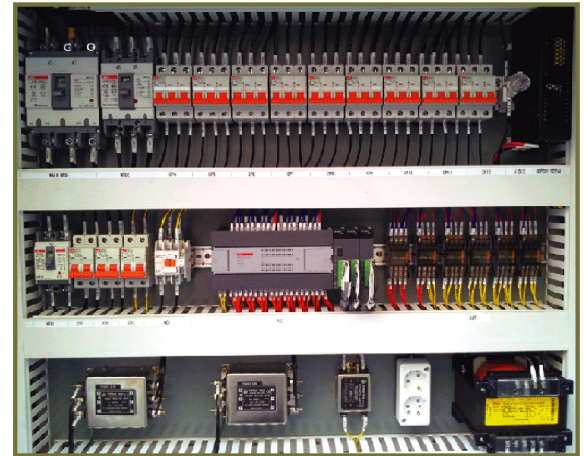
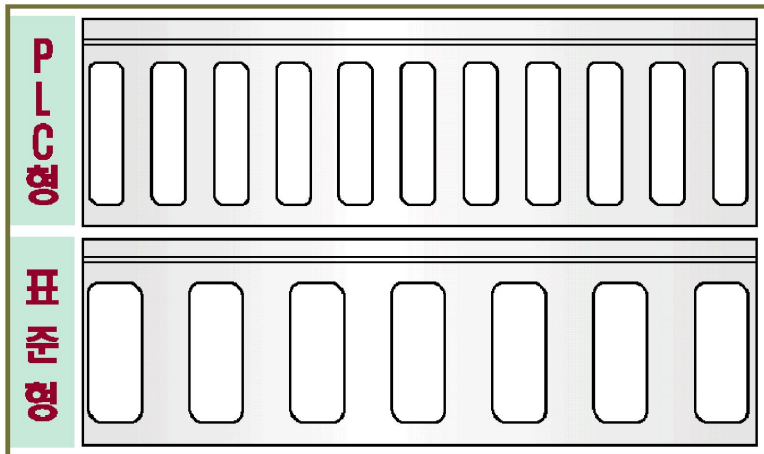
◆ Model

DO - 86, 88, 810, 108,

PLC 형 백색 / 회색 / 청색 (RoHS-친환경 제품)


PLC Type White Color / Gray Color / Blue Color (RoHS-Green Products)

● 측면타공비교(PLC형/표준형)



● 측면도 및 측면타공비교(PLC형/표준형)

P L C 형					비 교	표 준 형			
A	B	C	D	Size	A	B	C	D	
5.8	19	13	6	30×40	10	20	20	6	
5.8	38	13	6	40×60	10	40	20	6	
5.8	56	13	8	40×80	10	57	20	8	
5.8	56	13	8	80×80	13	57	25	8	
5.8	75	13	8	40×100	10	76	20	8	
5.8	75	13	8	80×100	13	76	25	8	

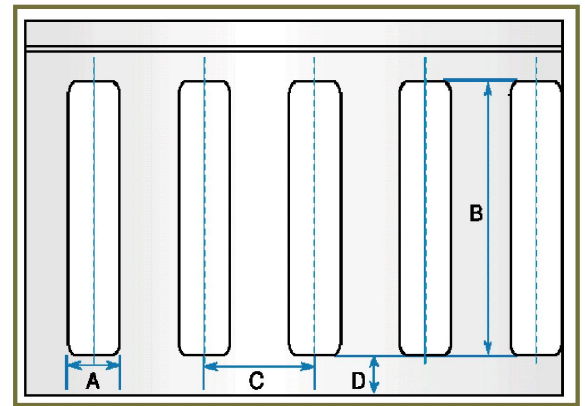


● 표준사양 (Standard Specifications)

DP - 34		DP - 44		DP - 64		DP - 26		DP - 36		DP - 46	
DP - 66		DP - 86		DP - 48		DP - 68		DP - 88		DP - 108	
DP - 410		DP - 610		DP - 810		DP - 1010					

※하단부 타공 Size : 개방형/표준형과 동일

※개폐부 Type : 개방형과 동일


ONLINE CERTIFICATIONS DIRECTORY

ZODZ2.E216771
Positioning Devices - Component

[Page Bottom](#)

Positioning Devices - Component

See General Information for Positioning Devices - Component

YOUNG SHIN PLA-TEC CO LTD
 21 BL 10 LOT
 425-8 NONHYUN-DONG
 NAMDONG-KU
 INCHEON, 405 849 REPUBLIC OF KOREA

E216771

Wiring Ducts, DG Series (white color only): Models DG-23, DG-24, DG-25, DG-34, DG-36, DG-44, DG-46, DG-48, DG-66, DG-68, DG-86, DG-88, DG-108, DG-410, DG-610, DG-810, DG-1010. Screw mounted. Slot walls. For use at temperatures not exceeding 50C.

Wiring Ducts, MH Series (white color only): Models MH-1, MH-2, MH-3, MH-4, MH-5. Screw mounted. Solid walls. For use at temperatures not exceeding 50C.

Wiring Ducts, MWS Series (white color only): Models MWS-1, MWS-2, MWS-3. Screw mounted. Solid walls. For use at temperatures not exceeding 50C.

Wiring Ducts, DO Series (white, grey and blue colors): Models "20x35", "25x40", "30x40", "40x40", "60x40", "25x60", "30x60", "40x60", "50x60", "60x60", "80x60", "20x80", "40x80", "50x80", "60x80", "80x80", "100x80", "40x100", "60x100", "80x100", "100x100". Screw mounted. Slotted walls. For use at temperatures not exceeding 50C.

Marking: Company name and model or catalog designation on the part or on the smallest unit package in which the component is shipped.
 Last Updated on 2011-05-24


[Questions?](#)
[Print this page](#)
[Notice of Disclaimer](#)
[Page Top](#)

Copyright 2011 Underwriters Laboratories Inc.®

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Listed and covered under UL's Follow-Up Service. Always look for the Mark on the product.

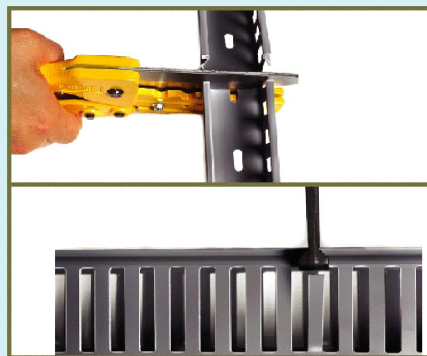
UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The guide information, designs and/or listings (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from Underwriters Laboratories Inc." must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "Copyright © 2011 Underwriters Laboratories Inc.®"

An independent organization working for a safer world with integrity, precision and knowledge.





■ Duct Tools



※ ABS DUCT 주문생산가능

※ 전기/전자/통신관련 친환경 이형(異型) 압출(壓黚)품 생산 가능